




RIGOL

RF Cable/Adapter/Torque Wrench

Product Manual
2025.11

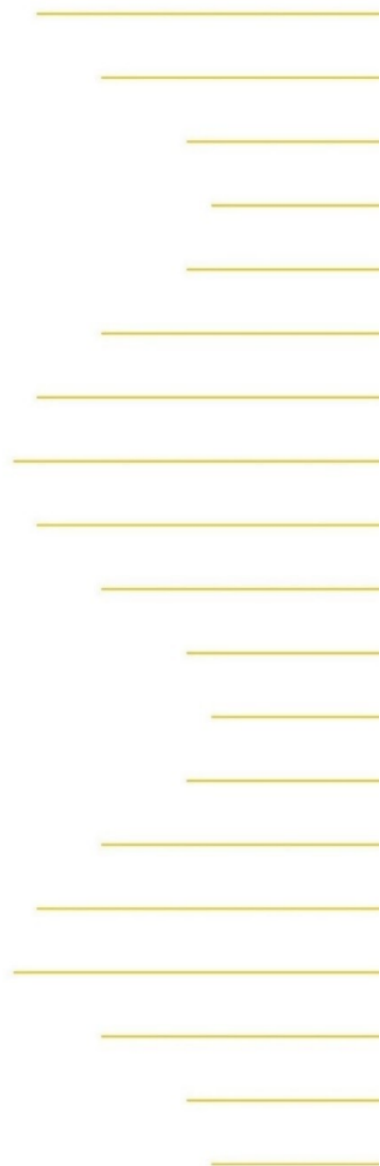

Guaranty and Declaration

Copyright

© 2025 RIGOL TECHNOLOGIES CO., LTD.

Trademark Information

RIGOL® is the trademark of RIGOL TECHNOLOGIES CO., LTD.

Publication Number

ADS04100-1110

Software Version

Software upgrade might change or add product features. Please acquire the latest version of the manual from **RIGOL** website or contact **RIGOL** to upgrade the software.

Notices

- **RIGOL** products are covered by P.R.C. and foreign patents, issued and pending.
- **RIGOL** reserves the right to modify or change parts of or all the specifications and pricing policies at the company's sole decision.
- Information in this publication replaces all previously released materials.
- Information in this publication is subject to change without notice.
- **RIGOL** shall not be liable for either incidental or consequential losses in connection with the furnishing, use, or performance of this manual, as well as any information contained.
- Any part of this document is forbidden to be copied, photocopied, or rearranged without prior written approval of **RIGOL**.

Product Certification

RIGOL guarantees that this product conforms to the national and industrial standards in China as well as the ISO9001:2015 standard and the ISO14001:2015 standard. Other international standard conformance certifications are in progress.

Contact Us

If you have any problem or requirement when using our products or this manual, please contact **RIGOL**.

E-mail: service@rigol.com

Website: www.rigol.com

Contents

Guaranty and Declaration	1
Document Overview	3
RF Cable: CB-3.5M-3.5M-100-L-26G	3
RF Cable: CB-SMAM-SMAM-100-L-18G	6
RF Cable: CB-NM-NM-100-L-18G	7
RF Cable: CB-NM-SMAM-100-L-18G	8
RF Cable: CB-NM-3.5M-100-L-18G.....	9
RF Cable: CB-NMD3.5F-3.5F-63-L-26G (For Network Analyzer).....	10
Adapter: AD-NF-NF-L-18G	11
Adapter: AD-NM-NM-L-18G	12
Adapter: AD-SMAF-SMAF-L-18G	13
Adapter: AD-SMAM-SMAM-L-18G	14
Adapter: AD-3.5F-3.5F-L-26G	15
Adapter: AD-3.5M-3.5M-L-26G.....	16
Adapter: AD-NM-BNCF-L-4G	17
Adapter: AD-SMAM-NM-L-18G	18
Adapter: AD-SMAF-NM-L-18G	19
Adapter: AD-SMAF-BNCF-L-4G	20
Adapter: AD-3.5M-2.92F-L-26G.....	21
Adapter: AD-3.5F-2.92M-L-26G.....	22
Torque Wrench: TW8-8.....	23
Torque Wrench: TW12-19.....	23

Document Overview

This manual provides specifications for RIGOL RF cables, adapters, and torque wrenches. These products are designed for use with vector network analyzers and calibration kits. You can visit the RIGOL official website (www.rigol.com) to download the latest manuals for vector network analyzers and calibration kits.

RF Cable

Model	Frequency Range	Connector
CB-3.5M-3.5M-100-L-26G	DC-26.5 GHz	3.5 mm (Male)- 3.5 mm (Male), 100 cm
CB-SMAM-SMAM-100-L-18G	DC-18 GHz	SMA (Male)- SMA (Male), 100 cm
CB-NM-NM-100-L-18G	DC-18 GHz	N (Male)- N (Male), 100 cm
CB-NM-SMAM-100-L-18G	DC-18 GHz	N (Male)- SMA (Male), 100 cm
CB-NM-3.5M-100-L-18G	DC-18 GHz	N (Male)- 3.5 mm (Male), 100 cm
CB-NMD3.5F-3.5F-63-L-26G ^[1]	DC-26.5 GHz	NMD 3.5 mm (Female)- 3.5 mm (Female), 63.5 cm

[1] For use with vector network analyzers only.

Adapter

Model	Frequency Range	Connector
AD-NF-NF-L-18G	DC-18 GHz	N (Female)- N (Female)
AD-NM-NM-L-18G	DC-18 GHz	N (Male)- N (Male)
AD-SMAF-SMAF-L-18G	DC-18 GHz	SMA (Female)- SMA (Female)
AD-SMAM-SMAM-L-18G	DC-18 GHz	SMA (Male)- SMA (Male)
AD-3.5F-3.5F-L-26G	DC-26.5 GHz	3.5 mm (Female)- 3.5 mm (Female)
AD-3.5M-3.5M-L-26G	DC-26.5 GHz	3.5 mm (Male)- 3.5 mm (Male)
AD-NM-BNCF-L-4G	DC-4 GHz	N (Male)- BNC (Female)


AD-SMAM-NM-L-18G	DC-18 GHz	SMA (Male)- N (Male)
AD-SMAF-NM-L-18G	DC-18 GHz	SMA (Female)- N (Male)
AD-SMAF-BNCM-L-4G	DC-4 GHz	SMA (Female)- BNC (Male)
AD-3.5M-2.92F-L-26G	DC-26.5 GHz	3.5 mm (Male)- 2.92 mm (Female)
AD-3.5F-2.92M-L-26G	DC-26.5 GHz	3.5 mm (Female)- 2.92 mm (Male)

Torque Wrench

Model	Specification	Compatible Connector
TW8-8	8 in - lb, 8.1 mm open-end	SMA, 3.5 mm connector
TW812-19	12 in - lb, 19.1 mm open-end	N-type connector

RF Cable: CB-3.5M-3.5M-100-L-26G

DC-26.5 GHz, 3.5 mm (Male)- 3.5 mm (Male), 100 cm

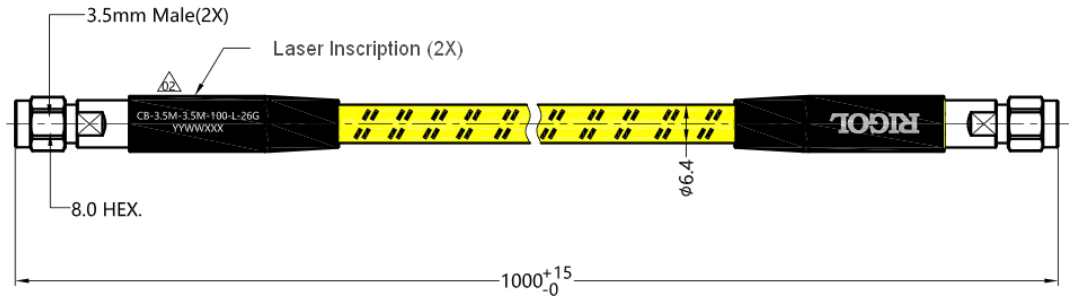

MATERIAL SPECIFICATIONS

Piece Parts	Materials	Plating
Coupling nut	Stainless steel	Passivation
Contact Pin	Brass	Gold
Insulator	PEI	Natural

ELECTRICAL SPECIFICATIONS

- Impedance: 50 Ω
- Frequency range: DC-26.5 GHz
- Voltage rating: 250 V_{rms}
- Dielectric withstanding voltage: 750 V (AC)
- Insulation resistance: 5000 $M\Omega$
- Insertion loss: $\leq 0.06 \times \sqrt{FGHz}$ dB
- VSWR: ≤ 1.2

MECHANICAL SPECIFICATIONS


- Force to engage and disengage: N/A
- Center contact retention force: > 6 lbs
- Recommended coupling torque: 7-9 in - lbs
- Coupling nut retention force: > 60 lbs
- Durability: ≥ 500 Cycles

ENVIRONMENTAL SPECIFICATIONS

- RoHS & REACH: Compliant
- Temperature range: -55 $^{\circ}C$ - +125 $^{\circ}C$

RF Cable: CB-SMAM-SMAM-100-L-18G

DC-18 GHz, SMA (Male)- SMA (Male), 100 cm

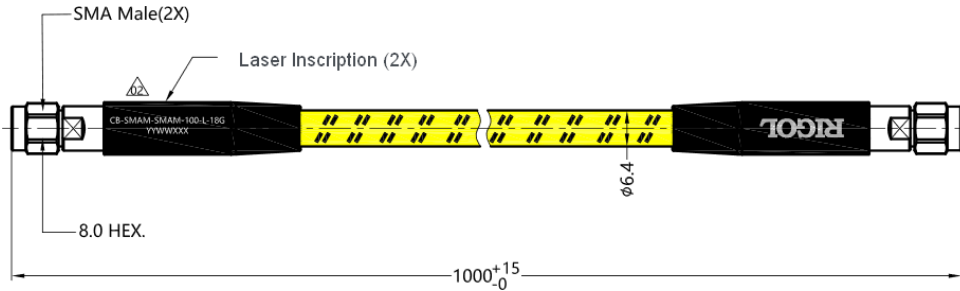

MATERIAL SPECIFICATIONS

Piece Parts	Materials	Plating
Coupling nut	Stainless steel	Passivation
Body	Stainless steel	Passivation
Contact Pin	Phosphor bronze	Gold
Insulator	PTFE	Natural
Barrel	Aluminum	Black anodizing
Cable	RG18, armored low-loss phase-stabilized RF cable, yellow and black	-

ELECTRICAL SPECIFICATIONS

- Impedance: 50 Ω
- Frequency range: DC-18 GHz
- Voltage rating: 250 V_{rms}
- Dielectric withstanding voltage: 750 V (AC)
- Insulation resistance: 5000 M Ω
- VSWR: ≤ 1.25
- Insertion loss: ≤ 2.4 dB
- Mechanical phase stability: $\pm 4^\circ$ (Dual channel)
- Mechanical amplitude stability: ± 0.1 dB (Dual channel)

MECHANICAL SPECIFICATIONS


- Min. bending radius static: 32 mm
- Min. bending radius dynamic: 64 mm
- Recommended coupling torque: 7 - 9 in - lbs
- Coupling nut retention force: 60 lbs
- Durability: 500 Cycles

ENVIRONMENTAL SPECIFICATIONS

- RoHS & REACH: Compliant
- Temperature range: -55 $^\circ\text{C}$ - +105 $^\circ\text{C}$

RF Cable: CB-NM-NM-100-L-18G

DC-18 GHz, N (Male)- N (Male), 100 cm

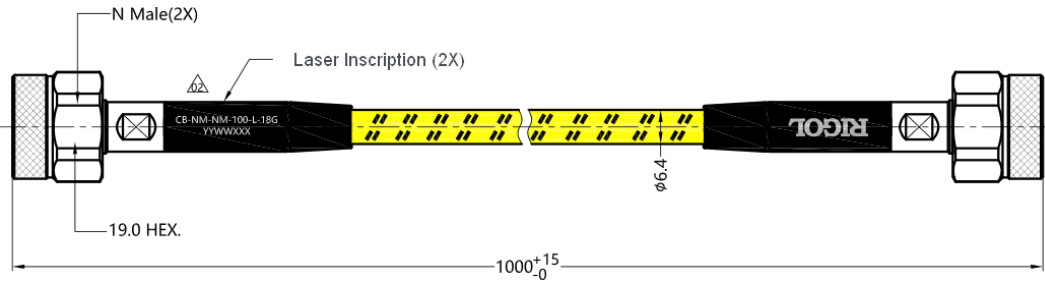

MATERIAL SPECIFICATIONS

Piece Parts	Materials	Plating
Coupling nut	Stainless steel	Passivation
Body	Stainless steel	Passivation
Contact Pin	Be - Cu	Gold
Insulator	PEI&PEEK	Natural
Barrel	Aluminum	Black anodizing
Cable	RG18, armored low-loss phase-stable RF cable, yellow and black	-

ELECTRICAL SPECIFICATIONS

- Impedance: 50 Ω
- Frequency range: DC-18 GHz
- Voltage rating: 250 V_{rms}
- Dielectric withstanding voltage: 750V (AC)
- Insulation resistance: 5000 MΩ
- VSWR: ≤ 1.25
- Insertion loss: ≤ 2.4dB
- Mechanical phase stability: ±4° (Dual-channel)
- Mechanical amplitude stability: ±0.1 dB (Dual-channel)

MECHANICAL SPECIFICATIONS


- Min. bending radius static: 32mm
- Min. bending radius dynamic: 64mm
- Recommended coupling torque: 9 - 14 in - lbs
- Coupling nut retention force: 100 lbs
- Durability: 500 Cycles

ENVIRONMENTAL SPECIFICATIONS

- RoHS & REACH: Compliant
- Temperature range: -55 °C - +105 °C

RF Cable: CB-NM-SMAM-100-L-18G

DC-18 GHz, N (Male)- SMA (Male), 100 cm

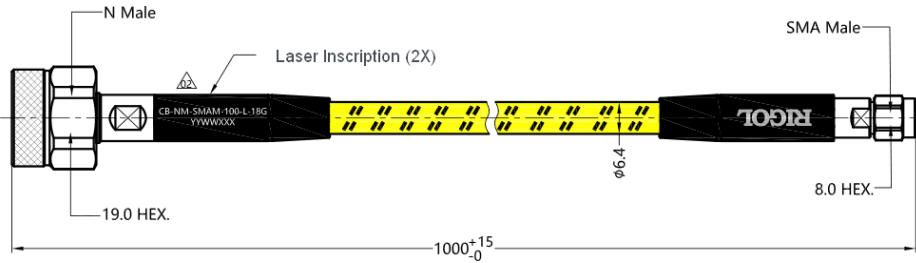

MATERIAL SPECIFICATIONS

Piece Parts	Materials	Plating
Coupling nut	Stainless steel	Passivation
Body	Stainless steel	Passivation
Contact Pin	NM (Be – Cu) SM (Phosphor bronze)	Gold;Gold
Insulator	PEI&PEEK(NM); PTFE(SM)	Natural; Natural
Barrel	Aluminum	Black anodizing
Cable	RG18, armored low-loss phase-stable RF cable, yellow and black	-

ELECTRICAL SPECIFICATIONS

- Impedance: 50 Ω
- Frequency range: DC-18 GHz
- Voltage rating: 250 V_{rms}
- Dielectric withstanding voltage: 750 V (AC)
- Insulation resistance: 5000 $M\Omega$
- VSWR: ≤ 1.25
- Insertion loss: $\leq 2.4dB$
- Mechanical phase stability: $\pm 4^\circ$ (Dual channel)
- Mechanical amplitude stability: ± 0.1 dB (Dual channel)

MECHANICAL SPECIFICATIONS


- Min. bending radius static: 32 mm
- Min. bending radius dynamic: 64 mm
- Recommended coupling torque:
 - 9 - 14 in - lbs (NM)
 - 7 - 9 in - lbs (SM)
- Coupling nut retention force: 100 lbs (NM); 60 lbs (SM)
- Durability: 500 Cycles

ENVIRONMENTAL SPECIFICATIONS

- RoHS & REACH: Compliant
- Temperature range: -55 $^\circ C$ - +105 $^\circ C$

RF Cable: CB-NM-3.5M-100-L-18G

DC-18 GHz, N (Male)- 3.5 mm (Male), 100 cm

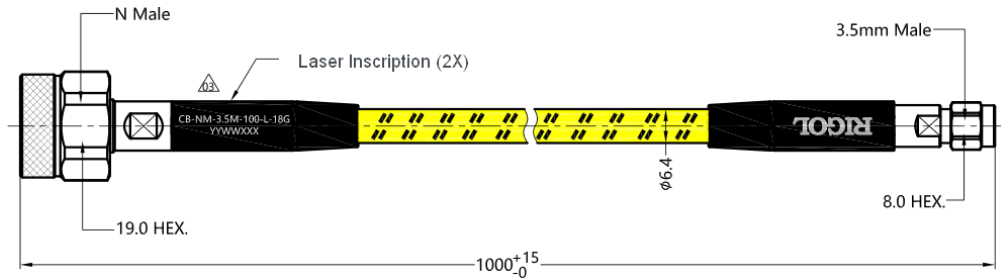

MATERIAL SPECIFICATIONS

Piece Parts	Materials	Plating
Coupling nut	Stainless steel	Passivation
Body	Stainless steel	Passivation
Contact Pin	Be – Cu	Gold
Insulator	PEI&PEEK(NM); PEEK(35 M)	Natural; Natural
Barrel	Aluminum	Black anodizing
Cable	RG18, armored low-loss phase-stable RF cable, yellow and black	-

ELECTRICAL SPECIFICATIONS

- Impedance: 50 Ω
- Frequency range: DC-18 GHz
- Voltage rating: 250 V_{rms}
- Dielectric withstanding voltage: 750 V (AC)
- Insulation resistance: 5000 M Ω
- VSWR: ≤ 1.25
- Insertion loss: ≤ 2.4 dB
- Mechanical phase stability: $\pm 4^\circ$ (Dual channel)
- Mechanical amplitude stability: ± 0.1 dB (Dual channel)

MECHANICAL SPECIFICATIONS


- Min. bending radius static: 32 mm
- Min. bending radius dynamic: 64 mm
- Recommended coupling torque:
 - 9 - 14 in - lbs (NM)
 - 7 - 9 in - lbs (35 M)
- Coupling nut retention force: 100 lbs (NM); 60 lbs (35 M)
- Durability: 500 Cycles

ENVIRONMENTAL SPECIFICATIONS

- RoHS & REACH: Compliant
- Temperature range: -55 $^\circ\text{C}$ - +105 $^\circ\text{C}$

RF Cable: CB-NMD3.5F-3.5F-63-L-26G (For Network Analyzer)

DC-26.5 GHz, NMD 3.5 mm (Female)- 3.5 mm (Female), 63.5 cm

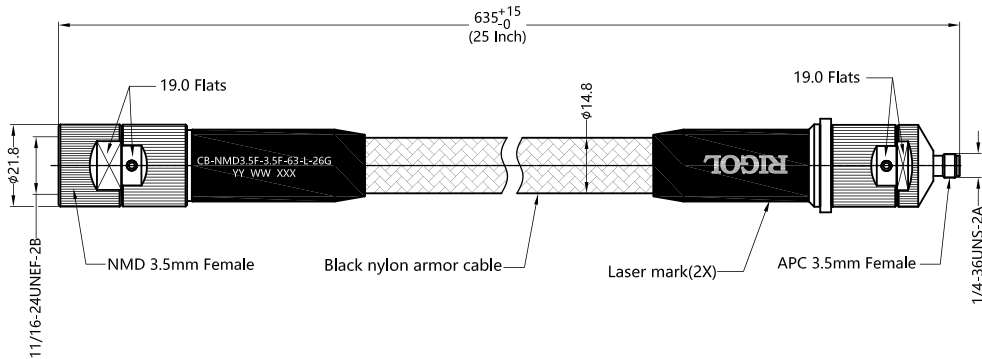

MATERIAL SPECIFICATIONS

Piece Parts	Materials	Plating
Coupling nut	Stainless steel	Passivation
Body	Stainless steel	Passivation
Contact Pin	Beryllium copper	Gold
Insulator	PEI & PEEK	Natural
Cable	Stainless steel double buckle black nylon armor	-

ELECTRICAL SPECIFICATIONS

- Impedance: 50 Ω
- Frequency range: DC-26.5 GHz
- Voltage rating: 250 V_{rms}
- Dielectric withstanding voltage: 750 V (AC)
- Insulation resistance: 5000 M Ω
- Insertion loss: ≤ 2.0 dB
- VSWR: ≤ 1.25
- Mechanical phase stability: $\pm 2.7^\circ$ (Dual channel)
- Mechanical amplitude stability: ± 0.08 dB (Dual channel)

MECHANICAL SPECIFICATIONS


- Min. bending radius static: 74 mm
- Min. bending radius dynamic: 148 mm
- Recommended coupling torque: 9 - 14 in - lbs
- Coupling nut retention force: 100 lbs
- Durability: 50,000 Cycles (FLEX)

ENVIRONMENTAL SPECIFICATIONS

- RoHS & REACH: Compliant
- Temperature range: -40 $^\circ\text{C}$ ~ +85 $^\circ\text{C}$

Adapter: AD-NF-NF-L-18G

DC-18 GHz, N (Female)- N (Female)

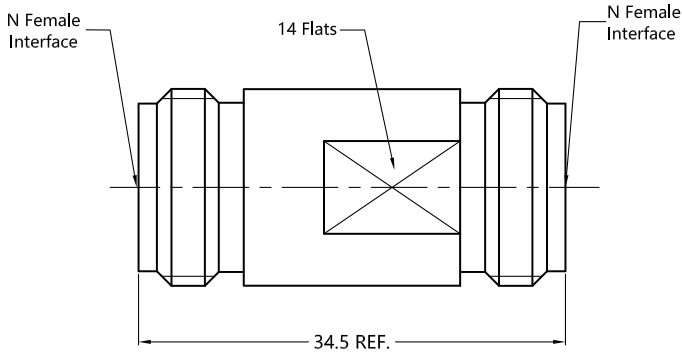

MATERIAL SPECIFICATIONS

Piece Parts	Materials	Plating
Body	Stainless steel	Passivation
Contact Pin	Be - Cu	Gold
Insulator	PEI	Natural

ELECTRICAL SPECIFICATIONS

- Impedance: 50 Ω
- Frequency range: DC-18 GHz
- Voltage rating: 250 V_{rms}
- Dielectric withstanding voltage: 750 V (AC)
- Insulation resistance: 5000 M Ω
- Insertion loss: $\leq 0.1 \times \sqrt{F(GHz)}$ dB
- VSWR: ≤ 1.2

MECHANICAL SPECIFICATIONS


- Force to engage and disengage: N/A
- Center contact retention force: > 6 lbs
- Recommended coupling torque: N/A
- Coupling nut retention force: N/A
- Durability: 500 Cycles

ENVIRONMENTAL SPECIFICATIONS

- RoHS & REACH: Compliant
- Temperature range: -55 $^{\circ}C$ - +125 $^{\circ}C$

Adapter: AD-NM-NM-L-18G

DC-18 GHz, N (Male)- N (Male)

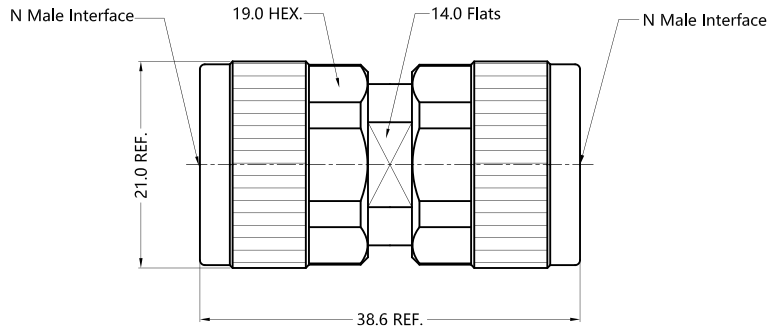

MATERIAL SPECIFICATIONS

Piece Parts	Materials	Plating
Body	Stainless steel	Passivation
Contact Pin	Be - Cu	Gold
Insulator	PEI	Natural

ELECTRICAL SPECIFICATIONS

- Impedance: 50 Ω
- Frequency range: DC-18 GHz
- Voltage rating: 250 V_{rms}
- Dielectric withstanding voltage: 750 V (AC)
- Insulation resistance: 5000 M Ω
- Insertion loss: $\leq 0.1 \times \sqrt{F(GHz)}$ dB
- VSWR: ≤ 1.2

MECHANICAL SPECIFICATIONS


- Force to engage and disengage: N/A
- Center contact retention force: > 6 lbs
- Recommended coupling torque: 9 - 14 lbs
- Coupling nut retention force: >100 lbs

ENVIRONMENTAL SPECIFICATIONS

- RoHS & REACH: Compliant
- Temperature range: -55 $^{\circ}C$ - +125 $^{\circ}C$

Adapter: AD-SMAF-SMAF-L-18G

DC-18 GHz, SMA (Female)- SMA (Female)

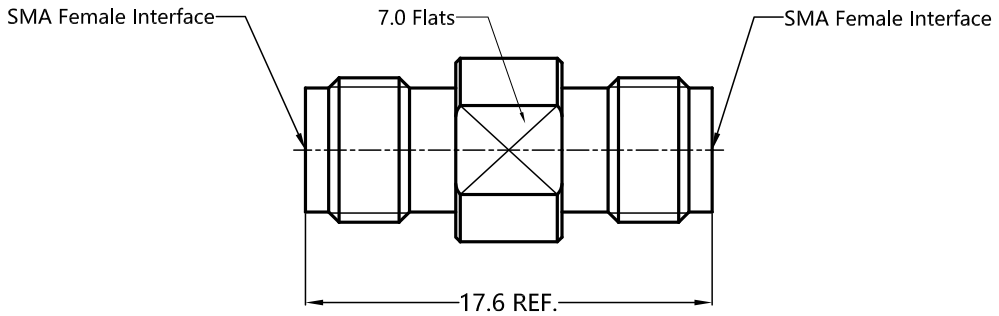

MATERIAL SPECIFICATIONS

Piece Parts	Materials	Plating
Body	Stainless steel	Passivation
Contact Pin	Be - Cu	Gold
Insulator	PTFE	Natural

ELECTRICAL SPECIFICATIONS

- Impedance: 50 Ω
- Frequency range: DC-18 GHz
- Voltage rating: 250 V_{rms}
- Dielectric withstanding voltage: 750 V (AC)
- Insulation resistance: 5000 M Ω
- Insertion loss: $\leq 0.06 \times \sqrt{F(\text{GHz})}$ dB
- VSWR: ≤ 1.2

MECHANICAL SPECIFICATIONS


- Force to engage and disengage: N/A
- Center contact retention force: > 6 lbs
- Recommended coupling torque: N/A
- Coupling nut retention force: N/A
- Durability: 500 Cycles

ENVIRONMENTAL SPECIFICATIONS

- RoHS & REACH: Compliant
- Temperature range: -55 $^{\circ}\text{C}$ - +125 $^{\circ}\text{C}$

Adapter: AD-SMAM-SMAM-L-18G

DC-18 GHz, SMA (Male)- SMA (Male)

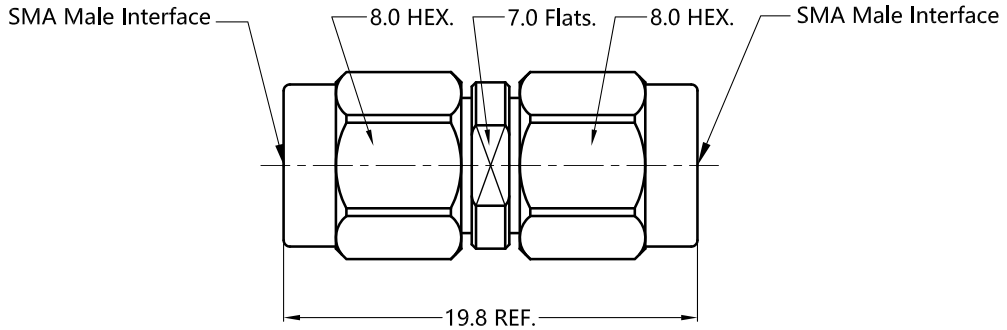

MATERIAL SPECIFICATIONS

Piece Parts	Materials	Plating
Shell	Stainless steel	Passivation
Body	Stainless steel	Gold
Contact Pin	Brass	Gold
Insulator	PTFE	Natural

ELECTRICAL SPECIFICATIONS

- Impedance: 50 Ω
- Frequency range: DC-18 GHz
- Voltage rating: 250 V_{rms}
- Dielectric withstanding voltage: 750 V (AC)
- Insulation resistance: 5000 M Ω
- Insertion loss: $\leq 0.06 \times \sqrt{F(\text{GHz})}$ dB
- VSWR: ≤ 1.2

MECHANICAL SPECIFICATIONS


- Force to engage and disengage: N/A
- Center contact retention force: > 6 lbs
- Recommended coupling torque: 7 - 9 in - lbs
- Coupling nut retention force: > 60 lbs
- Durability: 500 Cycles

ENVIRONMENTAL SPECIFICATIONS

- RoHS & REACH: Compliant
- Temperature range: -55 $^{\circ}\text{C}$ - +125 $^{\circ}\text{C}$

Adapter: AD-3.5F-3.5F-L-26G

DC-26.5 GHz, 3.5 mm (Female)- 3.5 mm (Female)

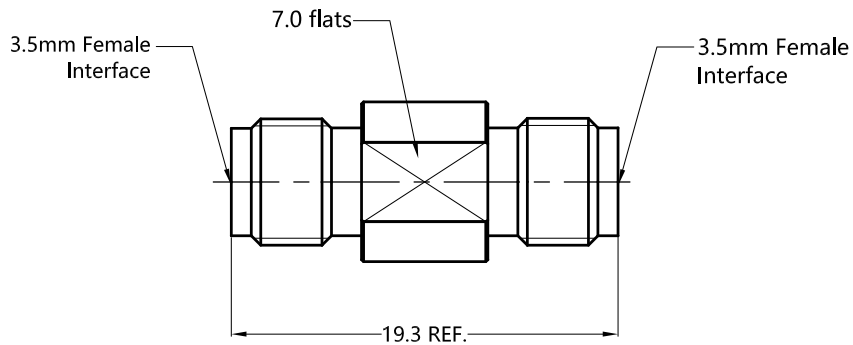

MATERIAL SPECIFICATIONS

Piece Parts	Materials	Plating
Body	Stainless steel	Passivation
Contact Pin	Be - Cu	Gold
Insulator	PEI	Natural

ELECTRICAL SPECIFICATIONS

- Impedance: 50 Ω
- Frequency range: DC-26.5 GHz
- Voltage rating: 250 V_{rms}
- Dielectric withstanding voltage: 750 V (AC)
- Insulation resistance: 5000 M Ω
- Insertion loss: $\leq 0.06 \times \sqrt{F(GHz)}$ dB
- VSWR: ≤ 1.2

MECHANICAL SPECIFICATIONS


- Force to engage and disengage: N/A
- Center contact retention force: > 6 lbs
- Recommended coupling torque: N/A
- Coupling nut retention force: N/A
- Durability: 500 Cycles

ENVIRONMENTAL SPECIFICATIONS

- RoHS & REACH: Compliant
- Temperature range: -55 $^{\circ}C$ - +125 $^{\circ}C$

Adapter: AD-3.5M-3.5M-L-26G

DC-26.5 GHz, 3.5 mm (Male)- 3.5 mm (Male)

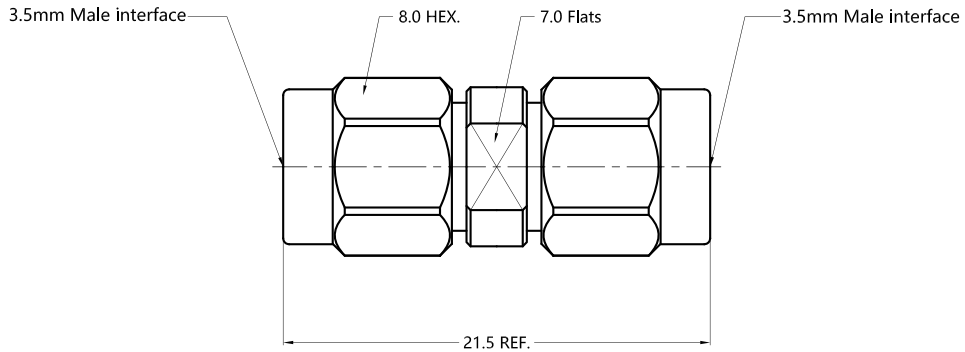

MATERIAL SPECIFICATIONS

Piece Parts	Materials	Plating
Shell	Stainless steel	Passivation
Contact Pin	Brass	Gold
Insulator	PEI	Natural

ELECTRICAL SPECIFICATIONS

- Impedance: 50 Ω
- Frequency range: DC-26.5 GHz
- Voltage rating: 250 V_{rms}
- Dielectric withstanding voltage: 750 V (AC)
- Insulation resistance: 5000 $M\Omega$
- Insertion loss: $\leq 0.06 \times \sqrt{F(GHz)}$ dB
- VSWR: ≤ 1.2

MECHANICAL SPECIFICATIONS


- Force to engage and disengage: N/A
- Center contact retention force: > 6 lbs
- Recommended coupling torque: 7 - 9 in - lbs
- Coupling nut retention force: > 60 lbs
- Durability: ≥ 500 Cycles

ENVIRONMENTAL SPECIFICATIONS

- RoHS & REACH: Compliant
- Temperature range: -55 $^{\circ}C$ - +125 $^{\circ}C$

Adapter: AD-NM-BNCF-L-4G

DC-4 GHz, N (Male)- BNC (Female)

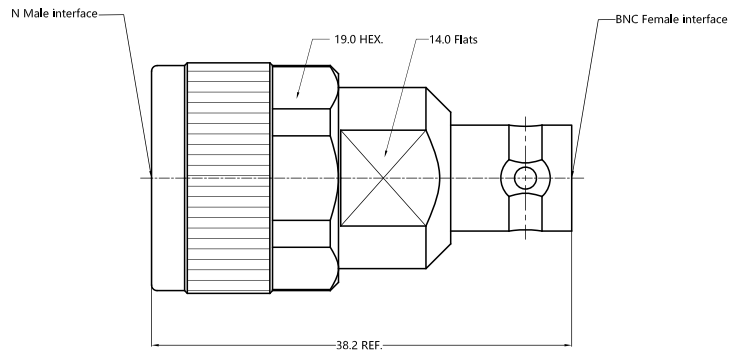

MATERIAL SPECIFICATIONS

Piece Parts	Materials	Plating
Shell	Stainless steel	Passivation
Contact Pin	Be - Cu	Gold
Insulator	PEI&PTFE	Natural

ELECTRICAL SPECIFICATIONS

- Impedance: 50 Ω
- Frequency range: DC-4 GHz
- Voltage rating: 250 V_{rms}
- Dielectric withstanding voltage: 750 V (AC)
- Insulation resistance: 5000 M Ω
- Insertion loss: $\leq 0.06 \times \sqrt{F(GHz)}$ dB
- VSWR: ≤ 1.2

MECHANICAL SPECIFICATIONS


- Force to engage and disengage: N/A
- Center contact retention force: > 6 lbs
- Recommended coupling torque: 9 - 14 in – lbs (N Male)
- Coupling nut retention force: > 100 lbs (N Male)
- Durability: ≥ 500 Cycles

ENVIRONMENTAL SPECIFICATIONS

- RoHS & REACH: Compliant
- Temperature range: -55 $^{\circ}C$ - +125 $^{\circ}C$

Adapter: AD-SMAM-NM-L-18G

DC-18 GHz, SMA (Male)- N (Male)

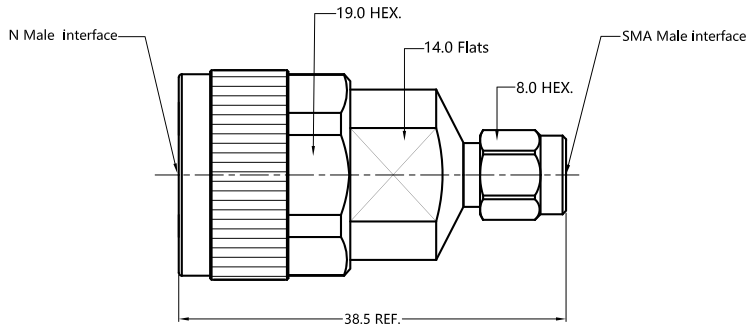

MATERIAL SPECIFICATIONS

Piece Parts	Materials	Plating
Shell/Body	Stainless steel	Passivation
Contact Pin	Brass	Gold
Insulator	PEI&PTFE	Natural

ELECTRICAL SPECIFICATIONS

- Impedance: 50 Ω
- Frequency range: DC-18 GHz
- Voltage rating: 250 V_{rms}
- Dielectric withstanding voltage: 750 V (AC)
- Insulation resistance: 5000 M Ω
- Insertion loss: $\leq 0.06 \times \sqrt{F(GHz)}$ dB
- VSWR: ≤ 1.2

MECHANICAL SPECIFICATIONS


- Force to engage and disengage: N/A
- Center contact retention force: > 6 lbs
- Recommended coupling torque:
 - 9 - 14 in – lbs (N Male);
 - 7 - 9 in – lbs (SMA Male)
- Coupling nut retention force:
 - 100 lbs (N Male);
 - > 60 lbs (SMA Male)
- Durability: ≥ 500 Cycles

ENVIRONMENTAL SPECIFICATIONS

- RoHS & REACH: Compliant
- Temperature range: -55 $^{\circ}C$ - +125 $^{\circ}C$

Adapter: AD-SMAF-NM-L-18G

DC-18 GHz , SMA (Female)- N (Male)

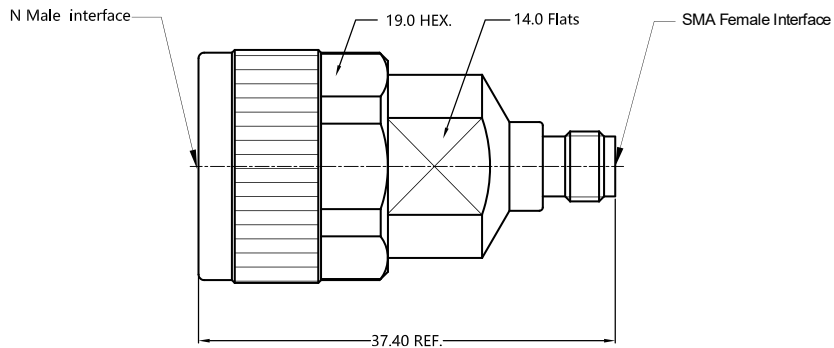

MATERIAL SPECIFICATIONS

Piece Parts	Materials	Plating
Shell/Body	Stainless steel	Passivation
Contact Pin	Be - Cu	Gold
Insulator	PTFE/PEI	Natural

ELECTRICAL SPECIFICATIONS

- Impedance: 50 Ω
- Frequency range: DC-18 GHz
- Voltage rating: 250 V_{rms}
- Dielectric withstanding voltage: 750 V (AC)
- Insulation resistance: 5000 M Ω
- Insertion loss: $\leq 0.08 \times \sqrt{F(\text{GHz})}$ dB
- VSWR: ≤ 1.2

MECHANICAL SPECIFICATIONS


- Force to engage and disengage: N/A
- Center contact retention force: > 6 lbs
- Recommended coupling torque:
 - 9 - 14 in – lbs (N Male);
 - Coupling nut retention force:
 - > 100 lbs (N Male);
- Durability: ≥ 500 Cycles

ENVIRONMENTAL SPECIFICATIONS

- RoHS & REACH: Compliant
- Temperature range: -55 $^{\circ}\text{C}$ - +125 $^{\circ}\text{C}$

Adapter: AD-SMAF-BNCM-L-4G

DC-4 GHz , SMA (Female)- BNC (Male)

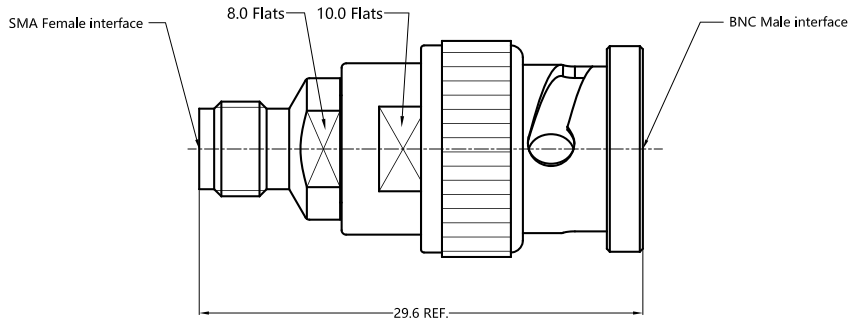

MATERIAL SPECIFICATIONS

Piece Parts	Materials	Plating
Body	Stainless steel/Be - Cu	Passivation/Nickel
Contact Pin	Be - Cu	Gold
Insulator	PEI/PTFE	Natural

ELECTRICAL SPECIFICATIONS

- Impedance: 50 Ω
- Frequency range: DC-4 GHz
- Voltage rating: 250 V_{rms}
- Dielectric withstanding voltage: 750 V (AC)
- Insulation resistance: 5000 $M\Omega$
- Insertion loss: $\leq 0.08 \times \sqrt{F(GHz)}$ dB
- VSWR: ≤ 1.2

MECHANICAL SPECIFICATIONS


- Force to engage and disengage: N/A
- Center contact retention force: > 6 lbs
- Coupling nut proof torque: N/A
- Coupling nut retention force: N/A
- Durability: ≥ 500 Cycles

ENVIRONMENTAL SPECIFICATIONS

- RoHS & REACH: Compliant
- Temperature range: -55 $^{\circ}C$ - +125 $^{\circ}C$

Adapter: AD-3.5M-2.92F-L-26G

DC-26.5 GHz, 3.5 mm (Male)- 2.92 (Female)

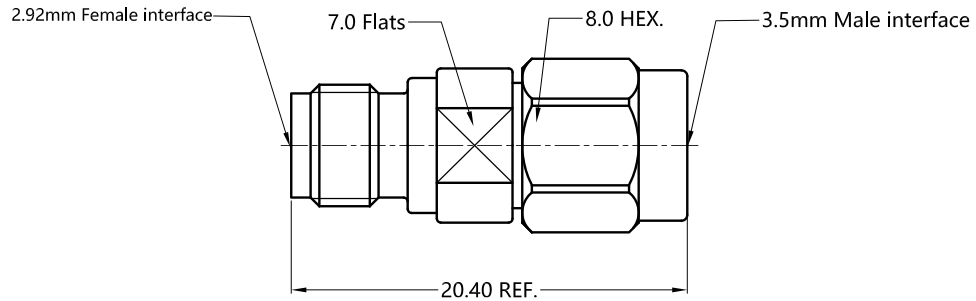

MATERIAL SPECIFICATIONS

Piece Parts	Materials	Plating
Shell	Stainless steel	Passivation
Body	Stainless steel	Gold
Contact Pin	Be - Cu	Gold
Insulator	PEI	Natural

ELECTRICAL SPECIFICATIONS

- Impedance: 50 Ω
- Frequency range: DC-26.5 GHz
- Voltage rating: 250 V_{rms}
- Dielectric withstanding voltage: 750 V (AC)
- Insulation resistance: ≥ 5000 MΩ
- Insertion loss: ≤ 0.08 × √F(GHz) dB
- VSWR: ≤ 1.2

MECHANICAL SPECIFICATIONS


- Force to engage and disengage: N/A
- Center contact retention force: > 6 lbs
- Recommended coupling torque:
7 - 9 in - lbs
- Coupling nut retention force:
> 60 lbs
- Durability: 500 Cycles

ENVIRONMENTAL SPECIFICATIONS

- RoHS & REACH: Compliant
- Temperature range: -55 °C - +125 °C

Adapter: AD-3.5F-2.92M-L-26G

DC-26.5 GHz, 3.5 mm (Female) - 2.92 mm (Male)

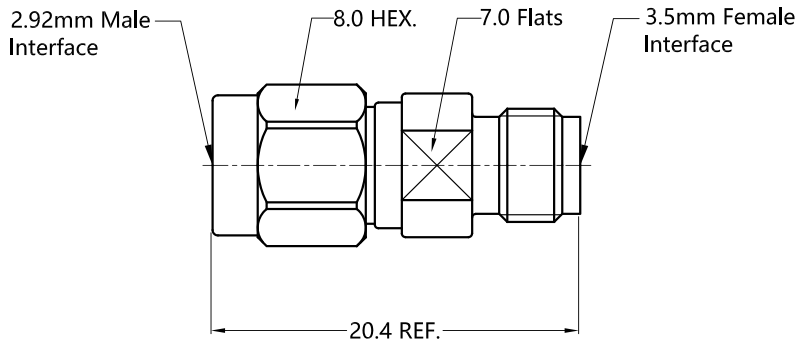

MATERIAL SPECIFICATIONS

Piece Parts	Materials	Plating
Shell/Body	Stainless steel	Passivation
Contact Pin	Be - Cu	Gold
Insulator	PTFE	Natural

ELECTRICAL SPECIFICATIONS

- Impedance: 50 Ω
- Frequency range: DC-26.5 GHz
- Voltage rating: 250 V_{rms}
- Dielectric withstanding voltage: 750 V (AC)
- Insulation resistance: $\geq 5000 M\Omega$
- Insertion loss: $\leq 0.07 \times \sqrt{F(GHz)}$ dB
- VSWR: ≤ 1.2


MECHANICAL SPECIFICATIONS

- Force to engage and disengage: N/A
- Center contact retention force: > 6 lbs
- Recommended coupling torque:
7 - 9 in - lbs
- Coupling nut retention force:
 > 60 lbs
- Durability: 500 Cycles

ENVIRONMENTAL SPECIFICATIONS

- RoHS & REACH: Compliant
- Temperature range: -55 $^{\circ}C$ - $+125$ $^{\circ}C$

Torque Wrench: TW8-8

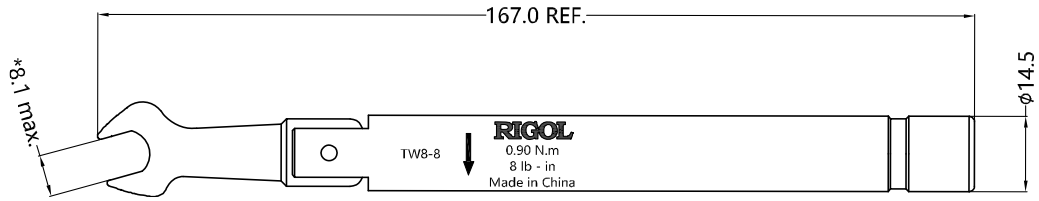


Material Specifications:

- Open-end head: stainless steel, nickel plated
- Handle: aluminum, anodized (black)
- Spring: manganese alloy
- Steel bead: stainless steel/passivation
- Spring pin: stainless steel, passivated
- Other parts: stainless steel, passivated

Notes:

- Torque specification: 0.9 ± 0.04 N.m
(8.0 ± 0.32 lb-in)
- Open-end size: 8.1 mm
- Application: 2.4 mm / 3.5 mm / 2.92 mm / SMA / 1.85 mm male connectors

Torque Wrench: TW12-19

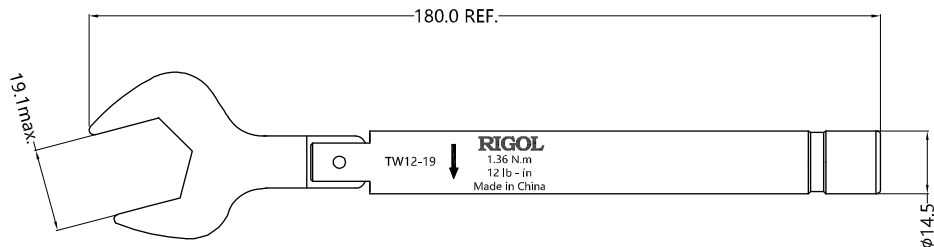

Material Specifications:

- Open-end head: stainless steel, nickel plated
- Handle: aluminum, anodized (black)
- Spring: manganese alloy
- Steel bead: stainless steel/passivation
- Spring pin: stainless steel, passivated
- Other parts: stainless steel, passivated

Notes:


- Torque specification: 1.36 ± 0.05 N.m
(12.0 ± 0.48 lb-in)
- Open-end size: 19.1 mm
- Application: N-type male connectors

Boost Smart World and Technology Innovation


Industrial Intelligent
Manufacturing



Semiconductors




Education &
Research

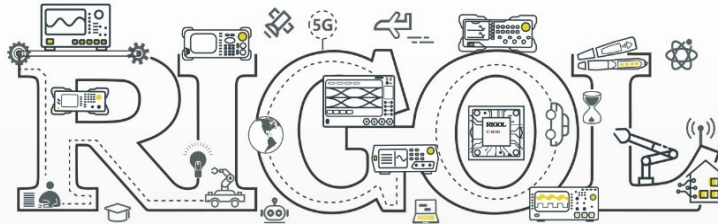

Communication

System Integration



New Energy



- 5G Cellular-5G/WIFI
- UWB/RFID/ ZIGBEE
- Digital Bus/Ethernet
- Optical Communication

- Digital/Analog/RF Chip
- Memory and MCU Chip
- Third-Generation Semiconductor
- Solar Photovoltaic Cells

- New Energy Automobile
- PV/Inverter
- Power Test
- Automotive Electronics

*Provide Testing and Measuring Products
and Solutions for Industry Customers*

HEADQUARTER

RIGOL TECHNOLOGIES CO., LTD.
No.8 Keling Road, New District,
Suzhou, JiangSu, P.R.China
Tel: +86-400620002
Email: info-cn@rigol.com

JAPAN

RIGOL JAPAN CO., LTD.
5F, 3-45-6, Minamiosuka, Toshima-Ku,
Tokyo, 170-0005, Japan
Tel: +81-3-6262-8932
Fax: +81-3-6262-8933
Email: info.jp@rigol.com

EUROPE

RIGOL TECHNOLOGIES EU GmbH
Friedrichshafener Str. 5
82205 Gilching
Germany
Tel: +49(0)8105-27292-21
Email: info-europe@rigol.com

KOREA

RIGOL KOREA CO., LTD.
5F, 222, Gonghang-daero,
Gangseo-gu, Seoul, Republic of Korea
Tel: +82-2-6953-4466
Fax: +82-2-6953-4422
Email: info.kr@rigol.com

NORTH AMERICA

RIGOL TECHNOLOGIES, USA INC.
10220 SW Nimbus Ave.
Suite K-7
Portland, OR 97223
Tel: +1-877-4-RIGOL-1
Email: sales@rigol.com

For Assistance in Other Countries

Email: info.int@rigol.com